

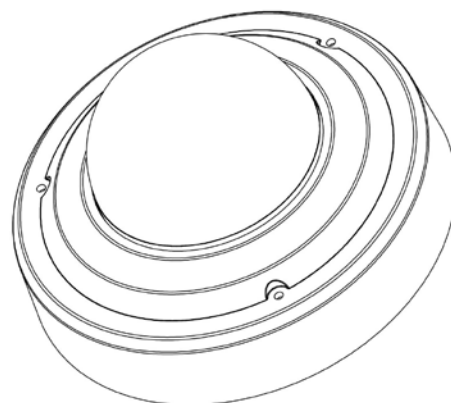
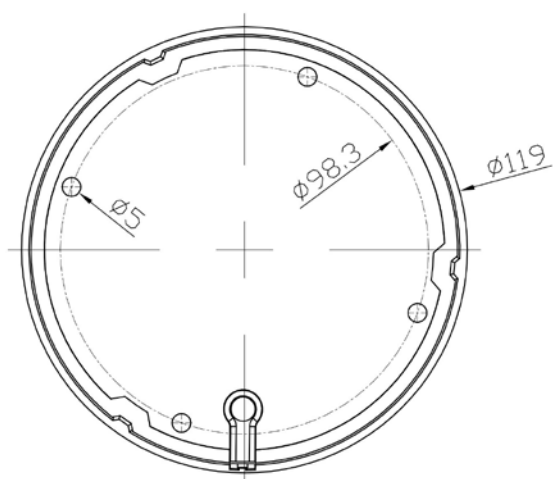
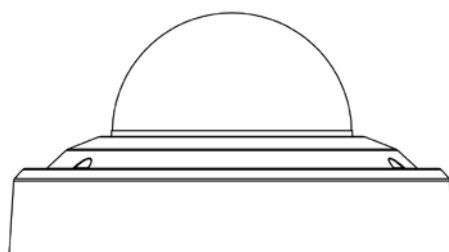


Model: 3S-W405AHBB52A

5MP UHD IP Camera H265/H264 IP66 Metal Dome

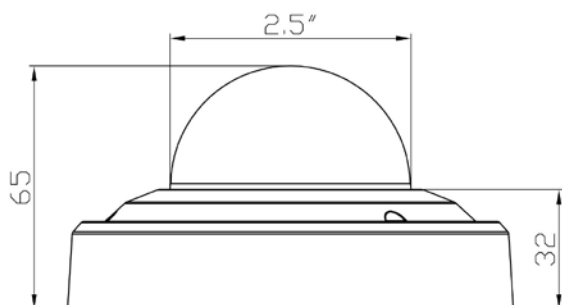

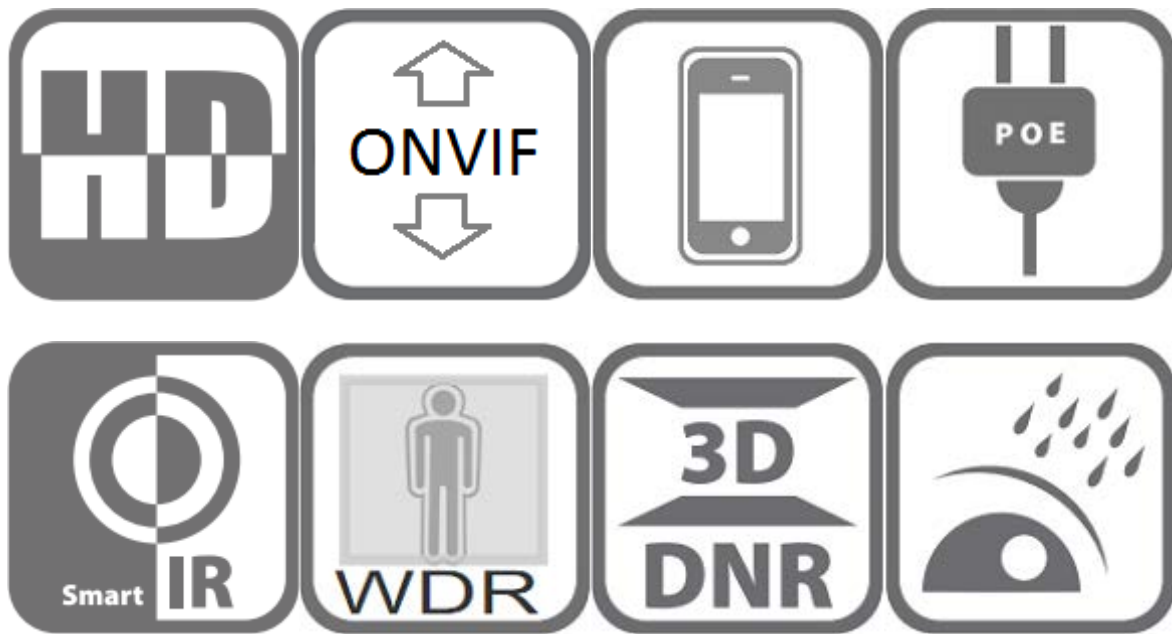

Features:

- ❖ 1/2.9" Sony IMX326 CMOS sensor
- ❖ Full HD resolution 2592 x 1944P
- ❖ Ultra low illumination 0.05Lux
- ❖ Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror, rotate
- ❖ RTSP and Onvif 2.6 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multiply web browser, PC Client, mobile APP remote access
- ❖ Optional Lens / POE / Audio
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 10pcs 14 μ SMD Array IR Leds, IR distance 10-15 meters
- ❖ 2.8mm 4.0MP Fixed Lens

Technical Specifications:

Model	3S-W405AHBB52A
Camera	
Image Sensor	1/2.9" Sony IMX326 CMOS
Effective Pixels	3096(H) × 2196 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.05Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror, Rotate
Encode	
Embedded Solution	Hi3516D
Video Standard	H.265/H.264
Video Resolution	Main Stream:18fps@5MP(2592x1944),25fps@4MP(2592x1520), 30fps@3MP/1080P/720P Sub Stream: VGA(640x480)/360P/QVGA@25fps, etc.
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
OSD Overlay	Title and Time overlay
IR Led	
IR Led	10pcs 14 μ SMD Array IR Leds
IR Distance	10-15 M
Lens	
Focal length	2.8 mm HD 4.0MP fixed lens
Optional Function	
Audio	
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.6 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30℃-(+60)℃, 10%-90%RH