



Model: 3S-W522FAHZ56EA

2.0MP 1080P H.265/H.264 IP66 Waterproof Bullet IP Camera

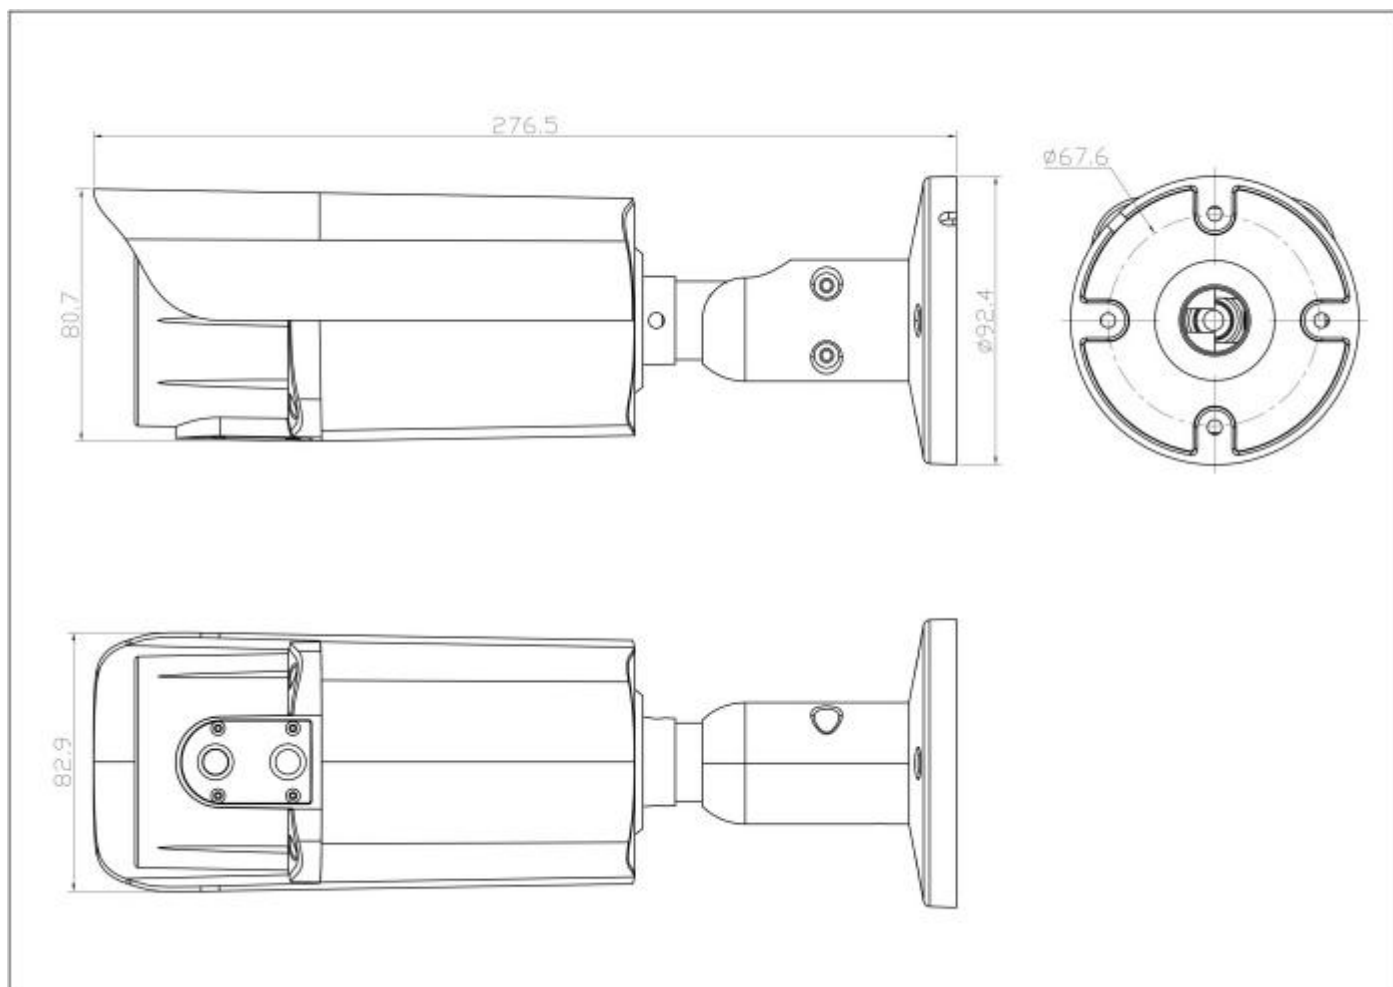

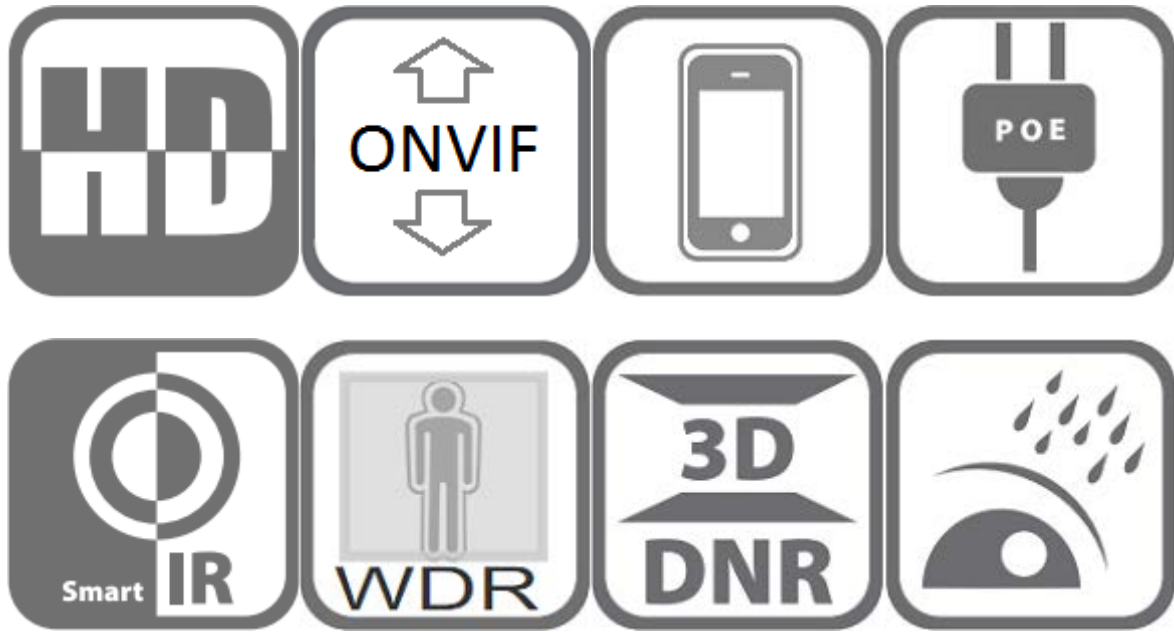

Features:

- ❖ 1/2.8" Sony IMX307 CMOS sensor
- ❖ Full HD resolution 1920 x 1080P
- ❖ Ultra low illumination 0.001Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 2.6 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multiply web browser, PC Client, mobile APP remote access
- ❖ Optional customization Lens/Audio/POE, etc.
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 20PCS 14 μ SMD Array IR LEDs, IR distance 30-35 meters
- ❖ HD **2.8-12mm** MP Varifocal Lens

Technical Specifications:

Model	3S-W522FAHZ56EA
Camera	
Image Sensor	1/2.8" Sony IMX307 CMOS
Effective Pixels	1945 (H) × 1097 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
AGC/BLC	Support
DNR	2D/3D DNR
Other	Motion Detection, Privacy Mask, Mirror, Flip
Encode	
Embedded Solution	Mstar MC313E
Video Standard	H.264/ H.265
Video Resolution	Main stream: 1080P@25fps , 720P@30fps
	Sub stream: VGA/360P@25fps
Video Bitrates	32Kbps - 6Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
IR Led	
IR Led	20PCS 14 μ SMD Array IR LEDs
IR Distance	30-35meters
Lens	
Focal length	HD 2.8-12mm MP Varifocal Lens
ZOOM	4X ZOOM
Optional Function	
POE, Audio etc.	
Network Services	
Protocol	RTSP/FTP/DHCP/NTP
P2P	Yes
Web	IE , Firefox esr, etc.
Media	CMS, Android, IOS
ONVIF	2.6 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C(+60)°C, 10%90%RH